

## WALL & CEILING LININGS




### SURFACE INSPECTION

All surfaces to be lined must be free of protrusions such as hex head screws, plumbing or electrical components. Wafer head screws are acceptable.

### CEILING FIXING DETAILS

1. Apply walnuts of recommended adhesive as specified by the lining manufacturer. Do not place adhesive where screws will be driven. Walnuts should be located at least 200mm from screw points.

2. Apply sheets with recessed edges at right angles to battens. Screw fix one recessed edge of the sheet to batten, then along the centre of the sheet, fixing one screw at each batten.
3. Butt join sheets to manufacturers specifications.
4. Screw fix the ends of each sheet around openings as required.

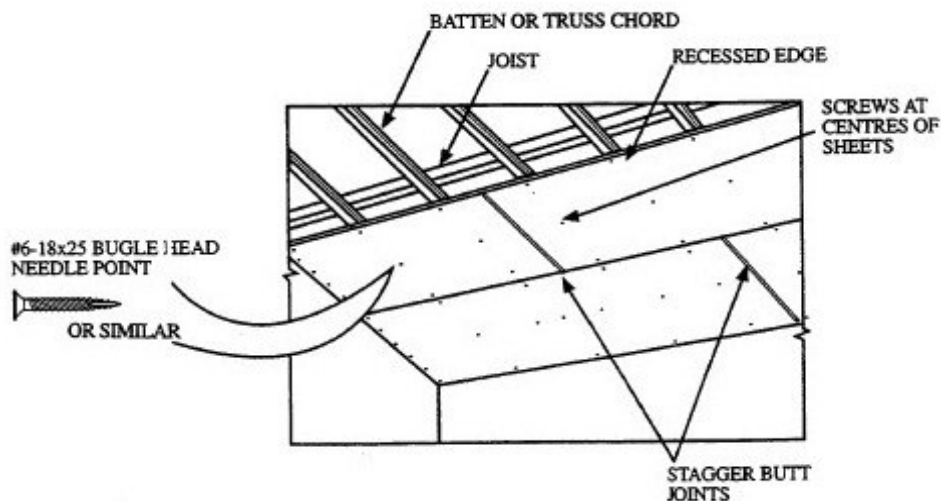

*Ceiling Lining Fixing*

## WALL FIXING DETAILS

1. Apply lining material manufacturer's recommended adhesive to studs with a broad knife, using enough material to form walnuts of adhesive, as recommended by the manufacturer.
2. Do not place adhesive where screws will be driven. Walnuts should be located at least 200mm from screw points.
3. Allow a gap of approximately 5mm between the bottom of the sheet and the floor. Apply the lining sheets horizontally, fixing the bottom

sheet first. Press the sheet firmly against the studs, then screw along one recessed edge of each stud.


4. Hold the sheet firmly against the studs, then screw fix along the second recessed edge. Finally, screw fix along the centre line of the sheet at every second stud.
5. Screw fix the ends of the sheet at butt joints, internal or external angles at recommended centres. Screw fix around all openings as recommended.

**USE APPROPRIATE SCREW FOR THE LINING MATERIAL USED**

**PLASTERBOARD**  
#6-18x25 BUGLE HEAD  
NEEDLE POINT



**FIBRE-CEMENT SHEET**  
#8-18x25 SELF EMBEDDING HEAD  
HEAVY DUTY DRILL POINT

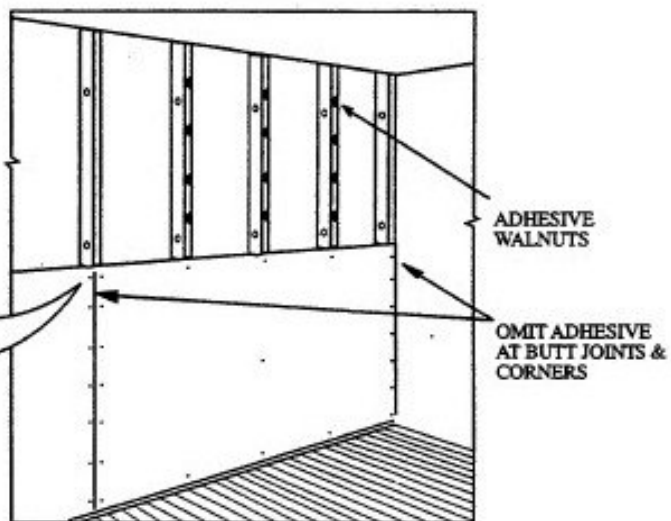

**Wall Lining Fixing**

For further information please contact:

National Association of Steel-Framed Housing Incorporated  
17-19 Gladding Place, PO Box 76-134, Manukau City

Phone: (09) 262 1625  
Toll free: 0800 333 225

Fax: (09) 262 2856  
Email: gm@nashnz.org.nz

V1.2 28.4.06

### IMPORTANT

This publication is designed to assist Qualified tradespersons in the fixing of materials to steel framed houses and is not intended for use by untrained personnel. The recommendations are a guide only. All fixing should be in accordance with manufacturers Specifications.

The information contained in this literature is correct at the time of printing. However, it is subject to change without notice.